
Bright Future

Apshon™


Apshon™

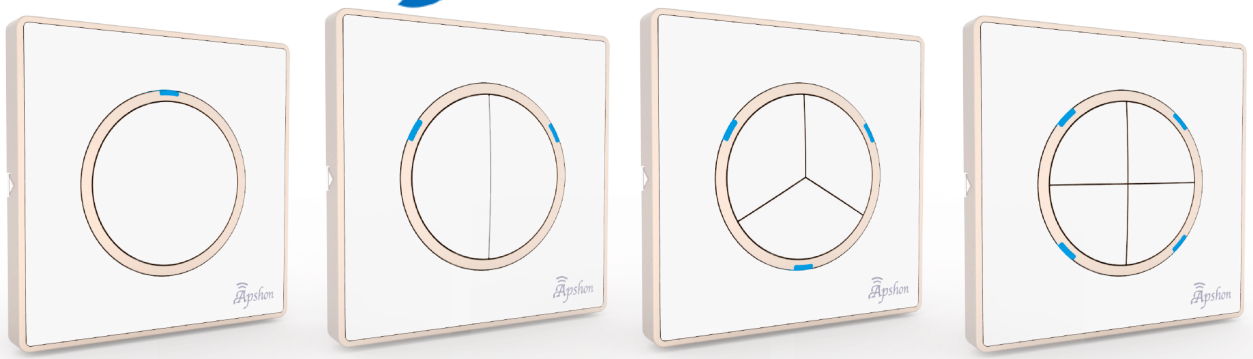

Smart Wall Switch

1. Any smartphone / tablet

Bluetooth 4.2 + Android 6.1 or above/IOS 10.0 or above

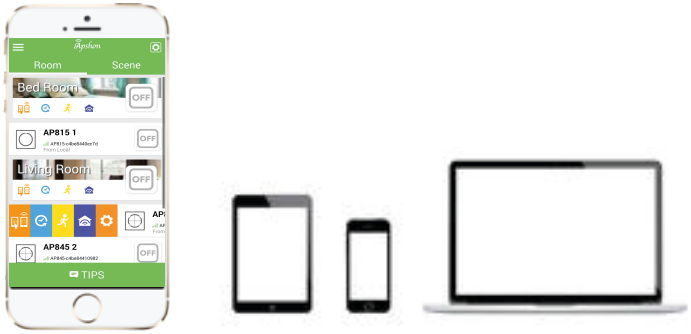

2. Download app “apshon”

Scan QR code

Apshon
Bright Future Group Limited

ANDROID APP ON Google play

Available on the App Store

or


apshon

Login and assign each switch

＊Open the app

＊make sure the bluetooth is on

＊app can detect the switches automatically，user need to login, assign a name and preferred room to each switch

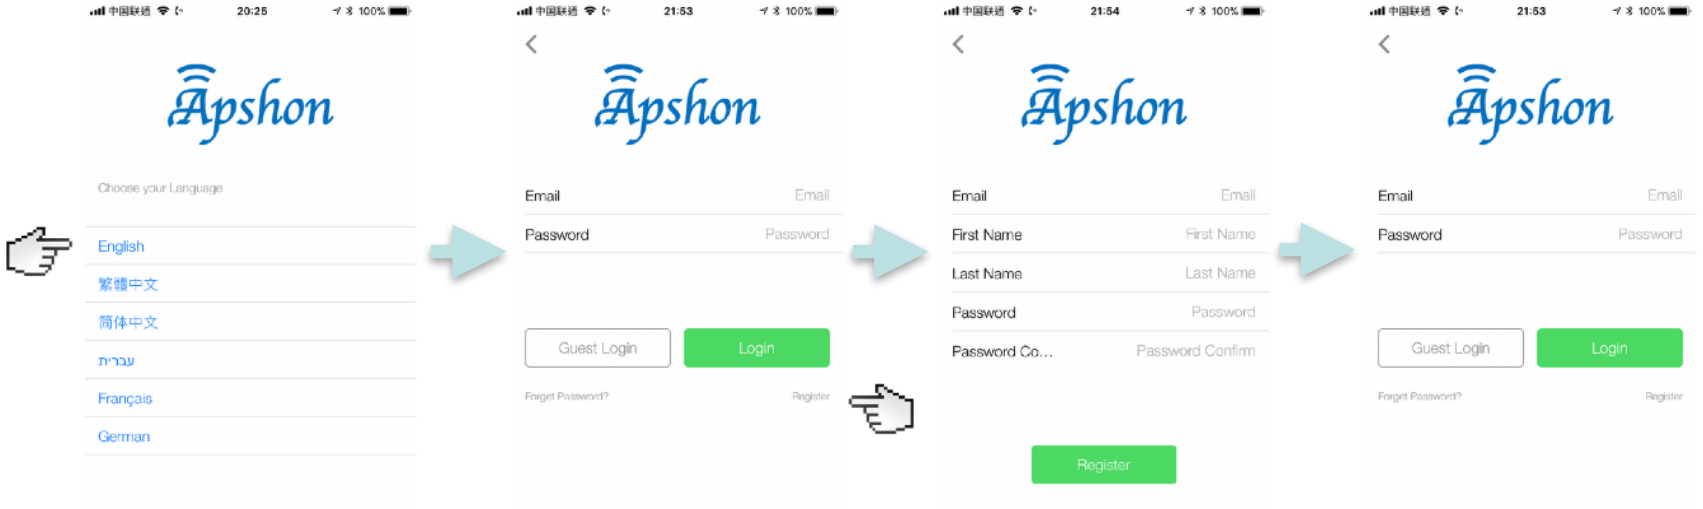


Choose language


Press “Register”

Key in your own email address and assign a password


Key in your own email address and password to login

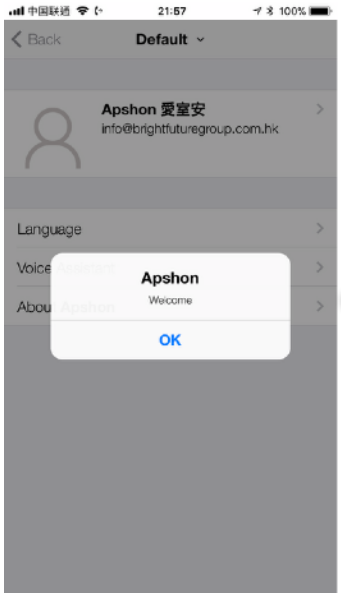


Welcome to Apshon

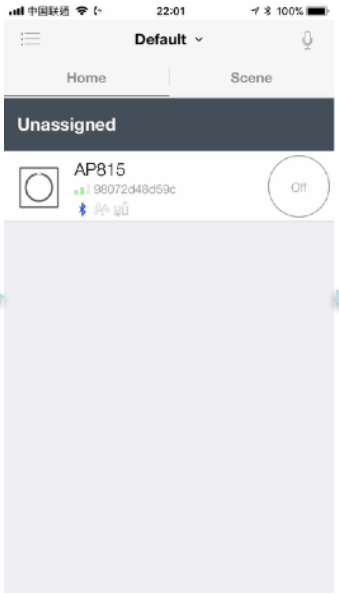

Press blank area of the pointed section

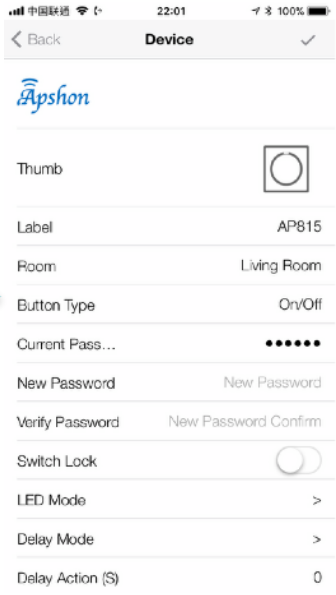

Assign a name “Label” to your switch and assign “Room” to it . Press ✓ to confirm

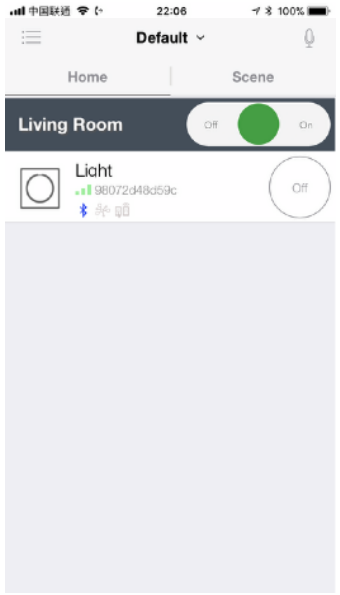


Repeat each switch/gang under “Unassigned” until all being assigned


After all switches/gangs are being assigned, other smartphones/tablets can share the same settings by simply login using the same email account.

Various Smart Functions

* Set smart functions by swipe to left and swipe to right.

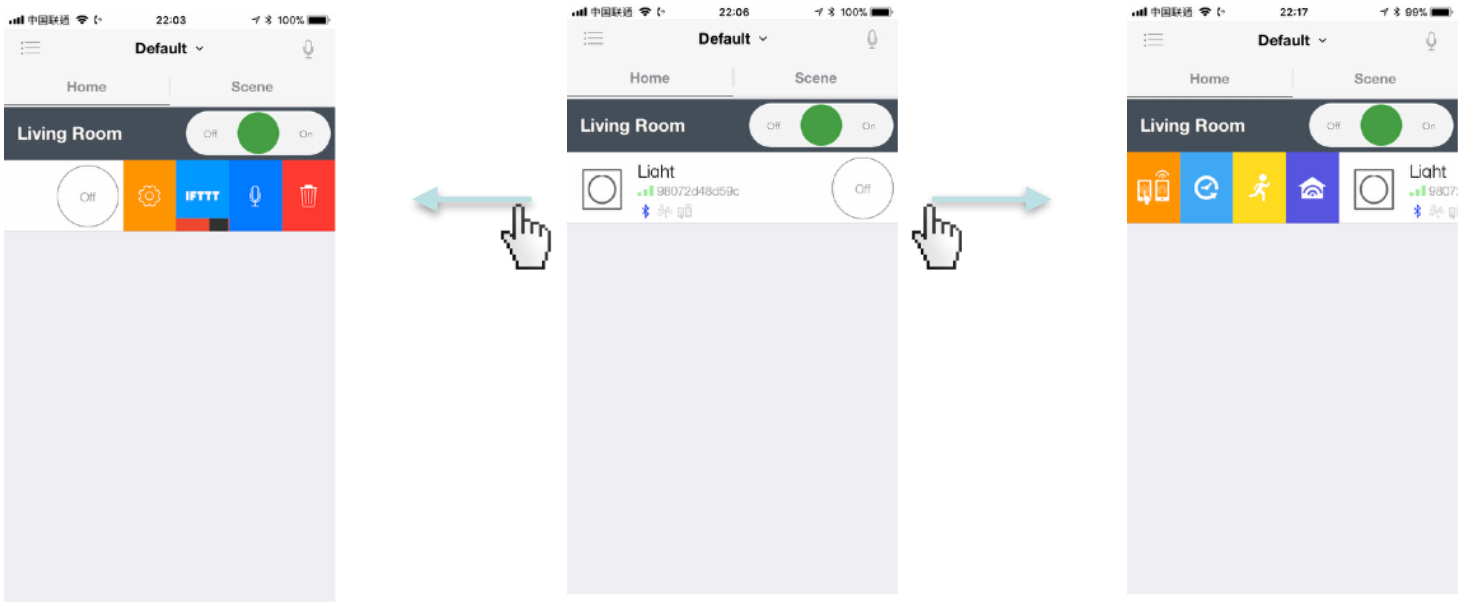

Various Smart Functions



Remote control: Turn it to orange in your home device (which needed to be plugged and app is on) to allow other devices with same login to control from outside.



Setting: Set the name, room, LED display, password, delay, etc.



Timer: Schedule your on/off once or repeat or daily.



Voice Control: Speak to the smartphone/tablet to control your smart switches.

Away detection: Set it to turn the switch on/off when you are approaching or leaving for a certain time and distance.



IFTTT: (under developing).




Smart Automation: Smart function to combine Timer and Away detection.



Trash: Delete the setting from the display.

Timer

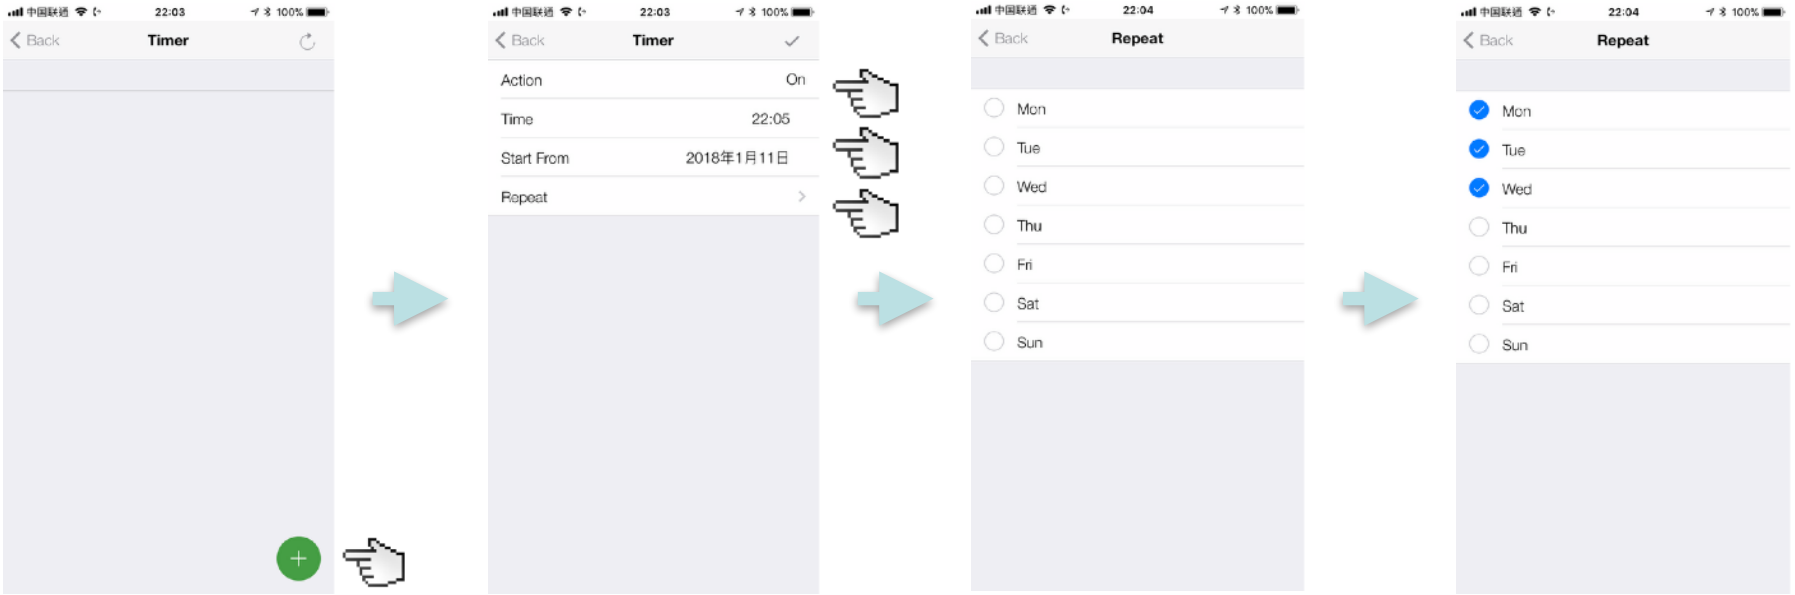


Press to set timer function. Press to add a timer

Select Action On/ Off, Time, Start From and Repeat


After pressing Repeat, you can select the repeat day or leave it to once

After select the day then press Back


Timer

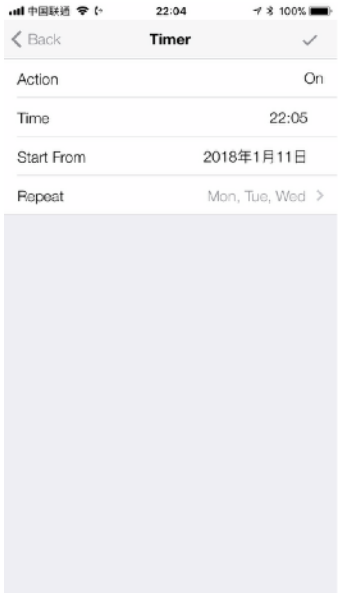

After setting everything, press ✓ to confirm

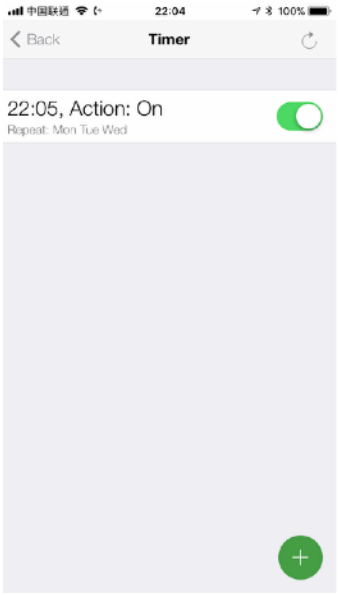


Timer is ready

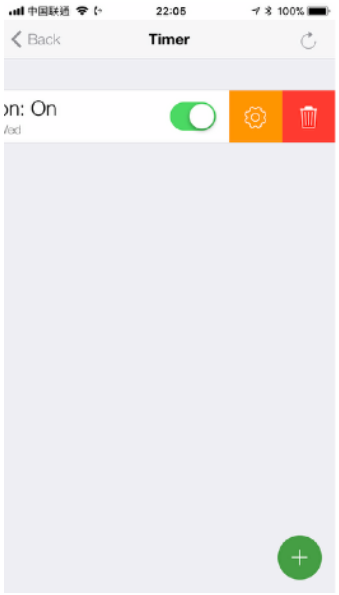

If any changes or delete, swipe to left and then press ⚙ or 🗑

Away Detection

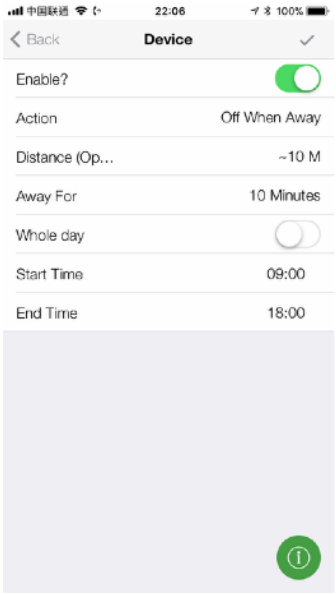


1) Enable: To activate this action

2) Action: On/Off When Away

3) Distance: set approximate distance


4) Whole day or only period

After setting everything, press ✓ to confirm

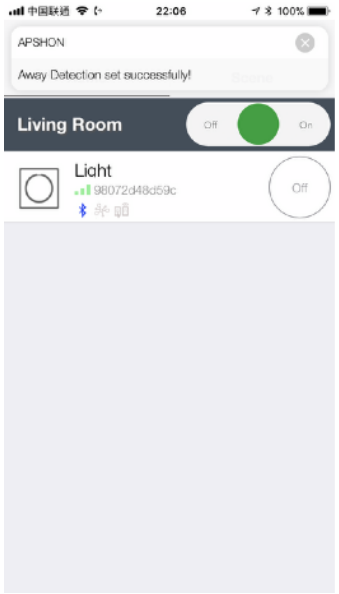

Once confirmed, the screen will display successfully

Smart Automation

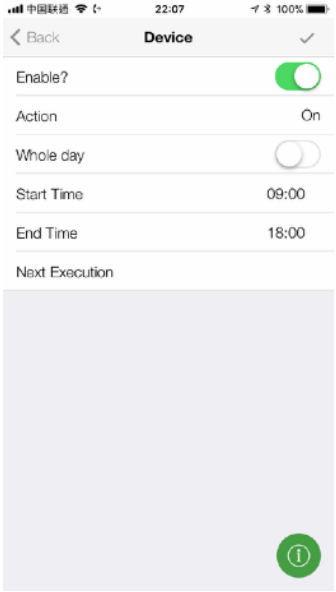


1) Enable: To activate this action

2) Action: On/Off When Away


3) Whole day or only period

After setting everything, press ✓ to confirm

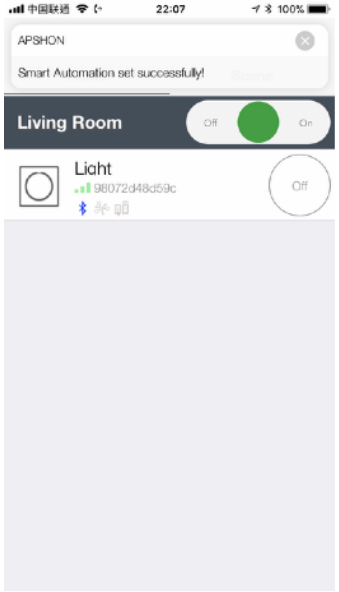

Once confirmed, the screen will display successfully

Setting

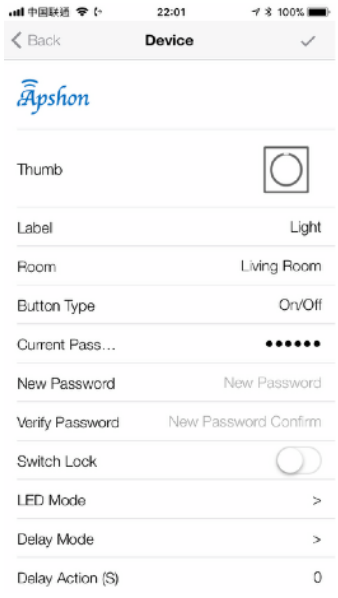

1) Thumb: Can choose pictures you prefer or take photos

2) Label: Give a name to the device that you prefer

3) Room: Assign the room for the device

4) Password: default 000000, can change

5) Switch Lock: Can disable the mechanical control


6) LED Mode: Can control the LED display

7) Delay Mode: Can set the delay after press the control


8) Delay Action(S): time delay

After setting everything,
press ✓ to confirm


Setting

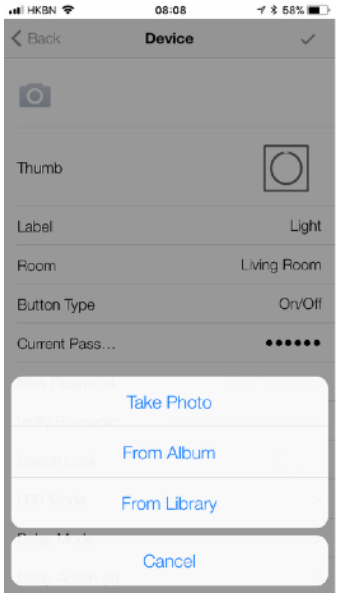


1) Thumb

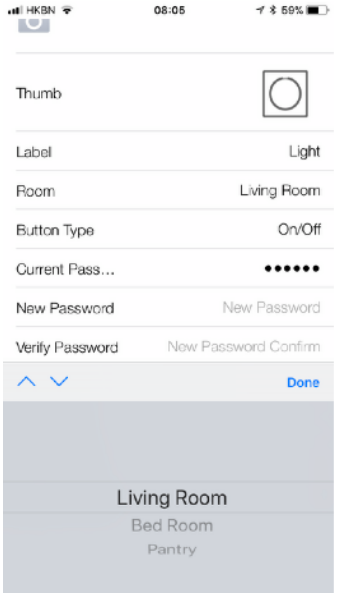

3) Room

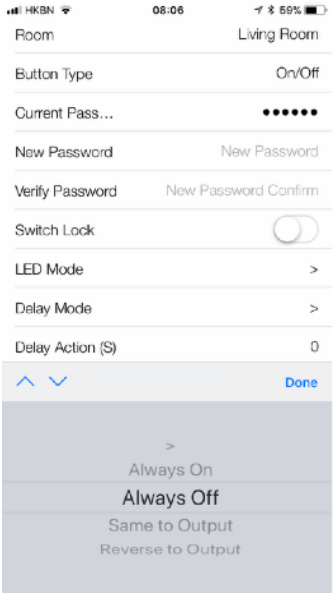


6) LED Mode

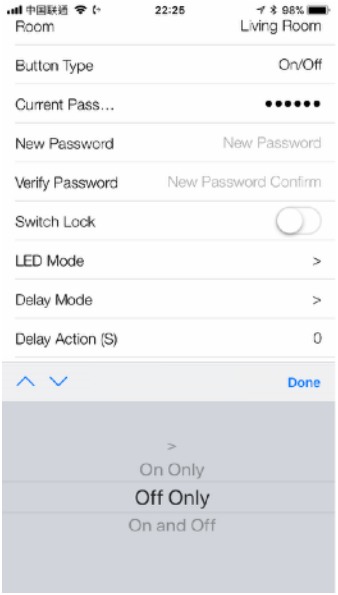

7) Delay Mode

Voice Control

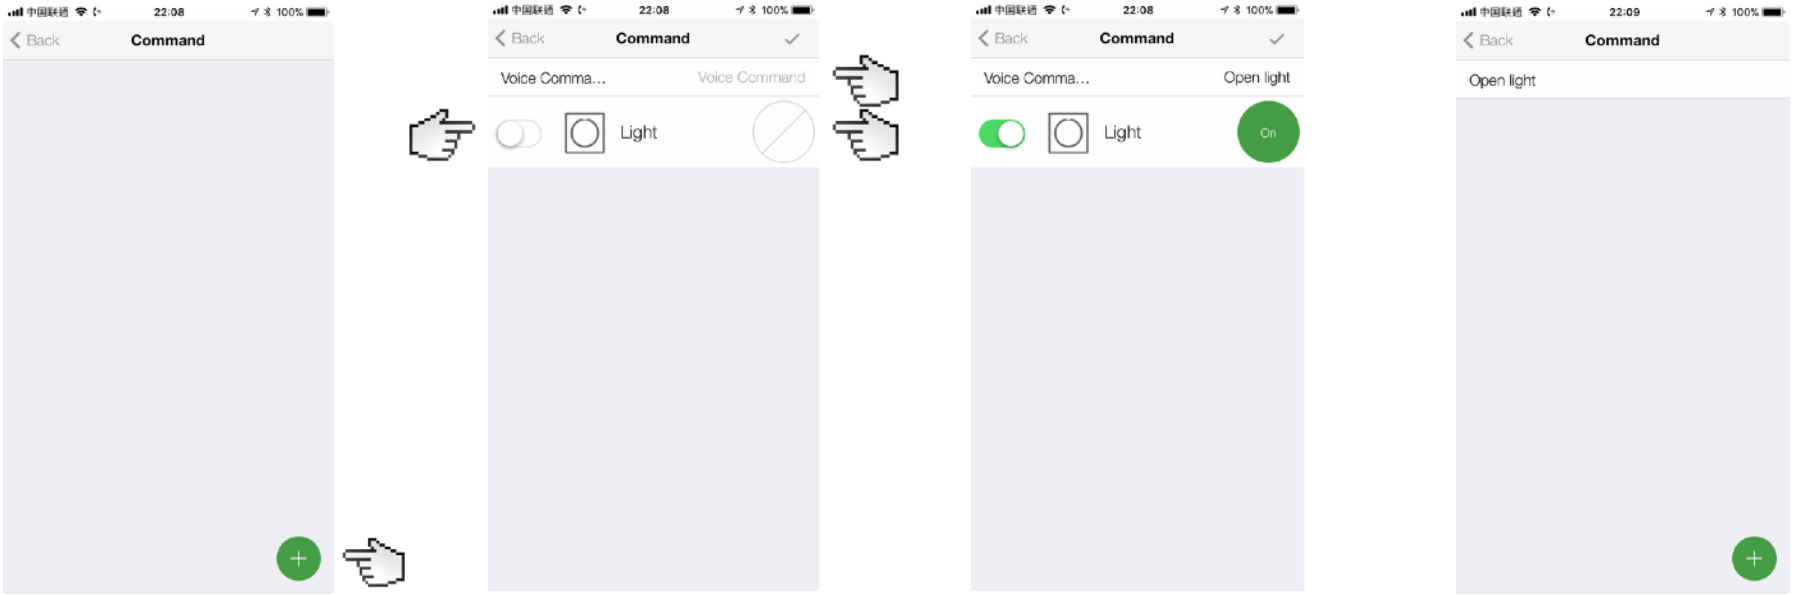


Press to set voice control. Press to add a command

Set Voice Command, set the action and enable

For example: Voice Command is " Open Light" and the action is On. Press to confirm

After confirm, "Open light" is displayed. More than one voice command can be set

Voice Control

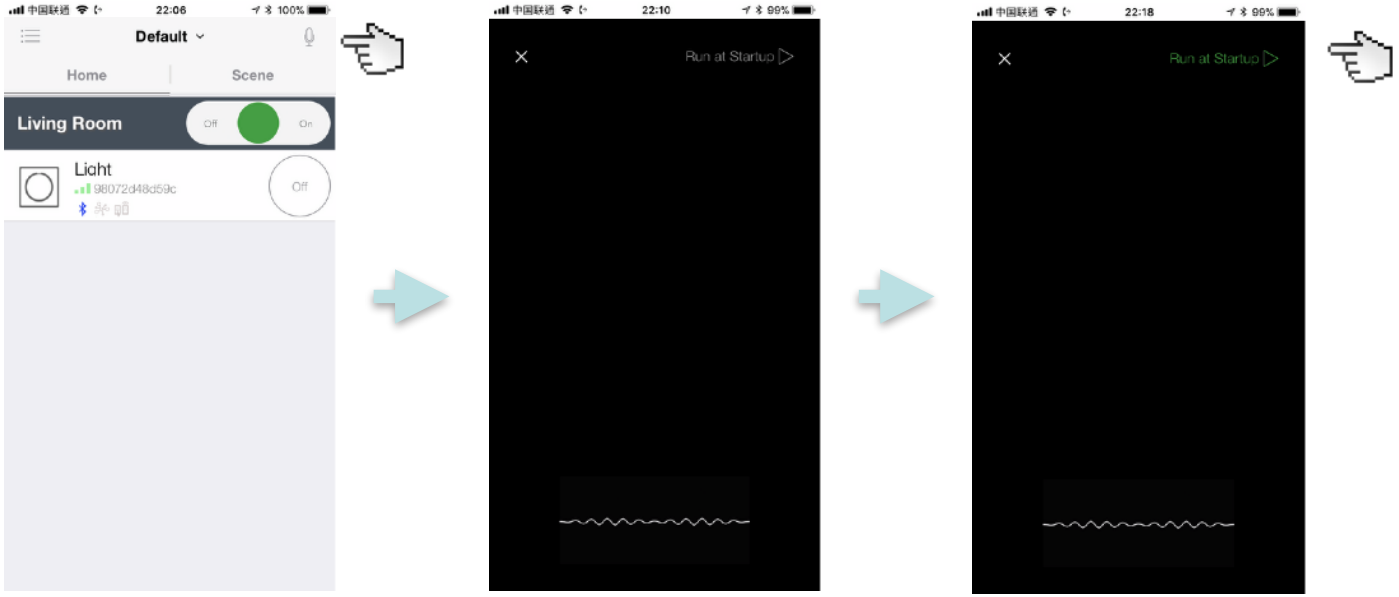


Press to activate voice control.

Under the above screen, speak to the phone/tablet and you can control the device


If you need to activate voice control every time the app is on, press “Run at Startup“

Scene


* Scene is a function that one click can activate multiple actions

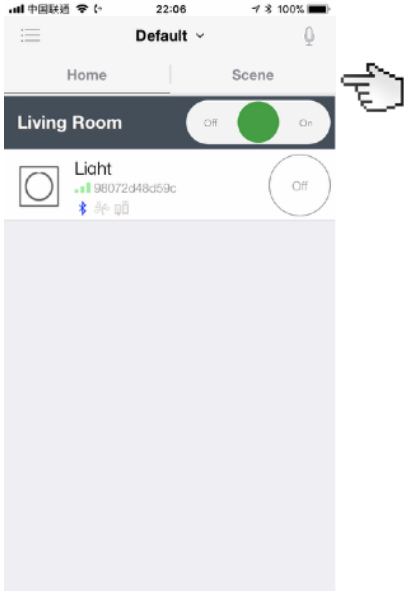


Press Scene to set the multiple actions

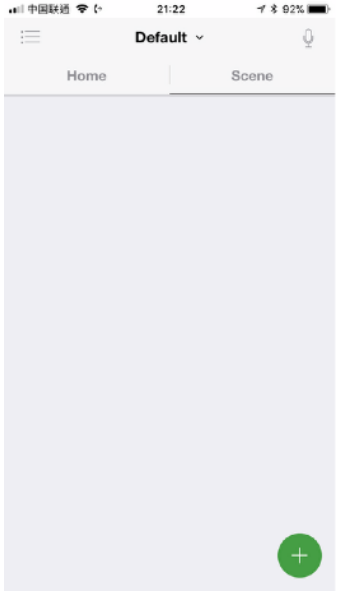


Press ⊕ to add scene

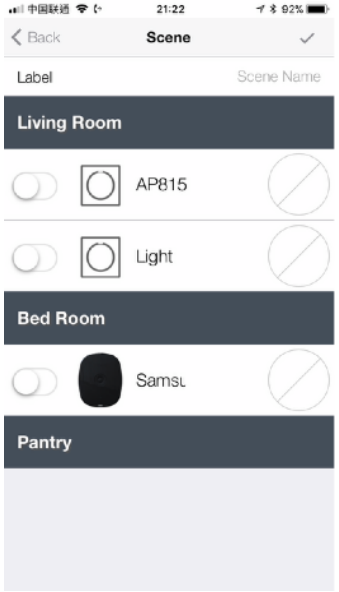

All switches, IR hubs are displayed.

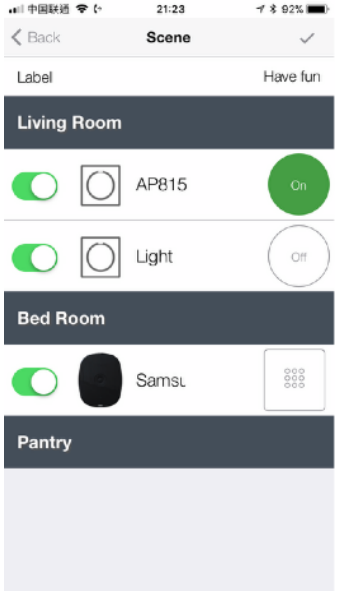


Give a name "Label" of this scene and set the actions of each one. Press ✓ to confirm

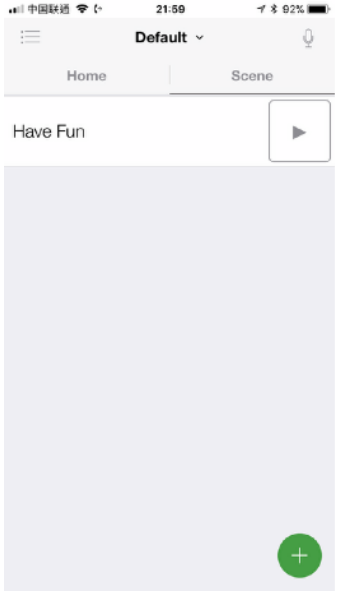

Press ▶ to activate, and can set voice control as well

Main Menu

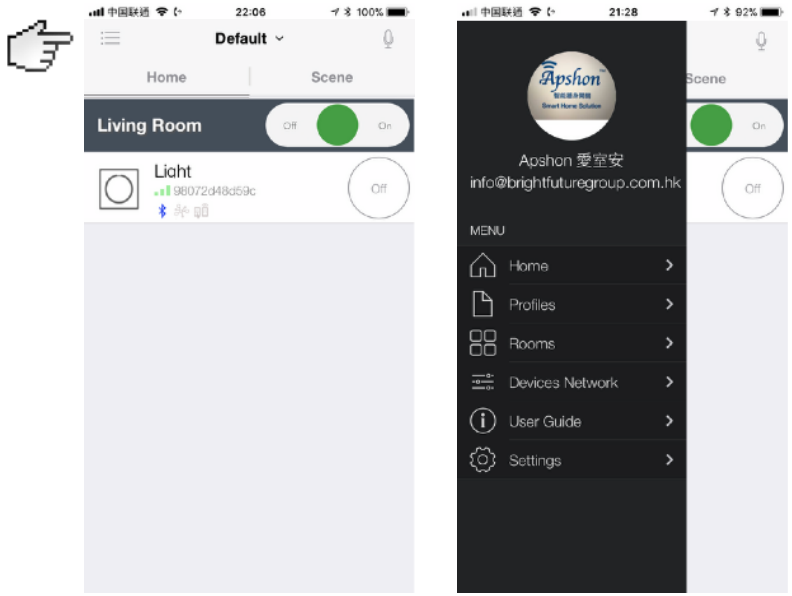

Press ☰ enter main menu

1) Home: Front page

2) Profile: Give a name to the device that you prefer

3) Rooms: Personalise the name of the rooms

4) Devices Network: link all devices together

5) User Guide: Can disable the mechanical control

6) Settings: account, language, version



Bright Future Group Limited
Tel: +852 5509 5011 **+852 55095011** **APSHON**
Email: info@brightfuturegroup.com.hk
Website: http://www.brightfuturegroup.com.hk
Add: Flat 1, 6/F, Winful Centre, 30 Shing Yip Street, Kwun Tong, Hong Kong